

Air Mercury Speciation Accuracy and Calibration

Presented at the

Fall Symposium


National Atmospheric Deposition Program

Park City Utah, 2013

Eric M. Prestbo, Ph.D.



Automated Hg Speciation Method (pat'd)

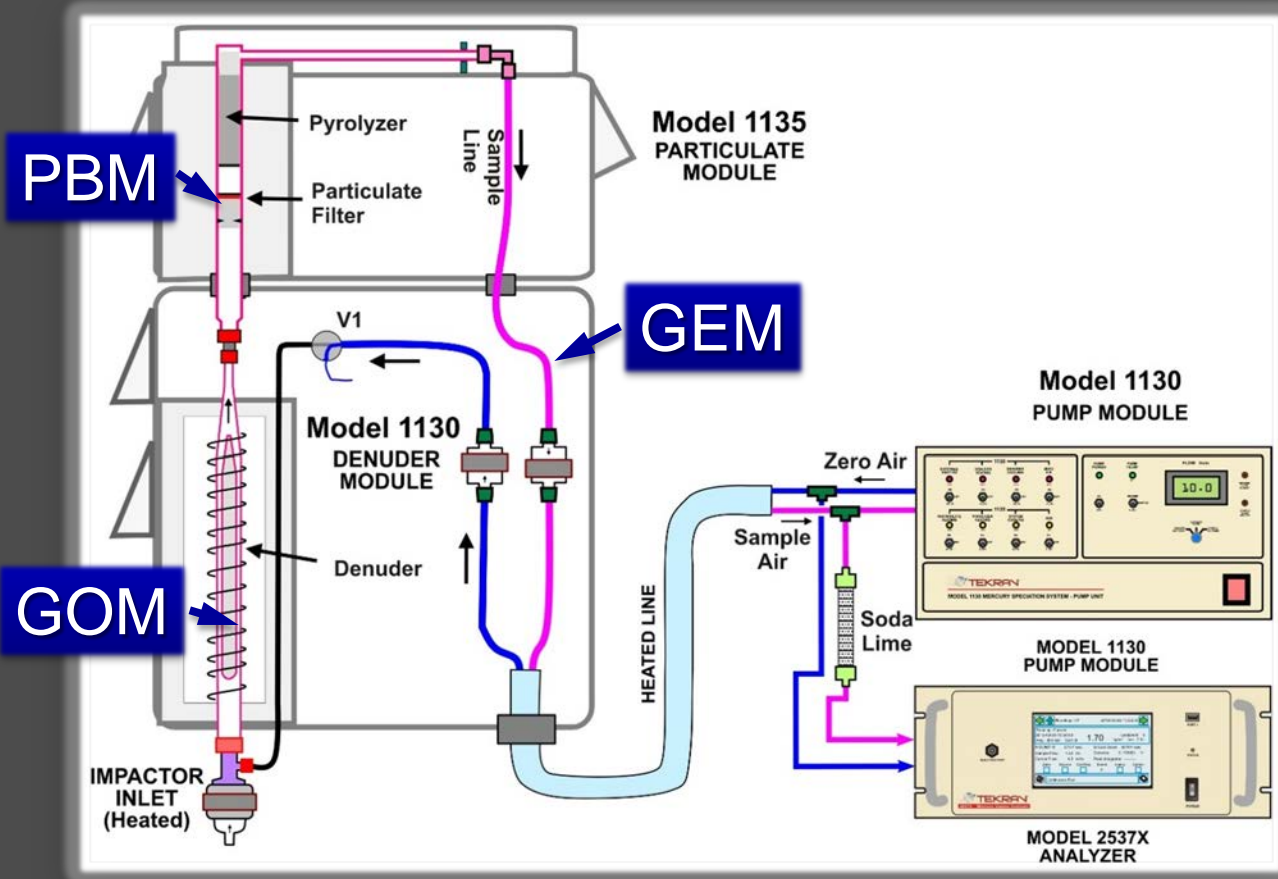

Method is:

- Lab tested
- Widely published
- QA Challenged
- Adopted by all advanced int'l & national networks

Motive and Historical Perspective for Hg Speciation Measurement

- **1994 GENESIS:** Small group of international experts convened and concluded that GOM should exist & method development must be a high priority (EPRI Report).
- **EARLY EXAMPLE:** 1996 at ICMGP – Report of unbelievable GOM levels of ~800 pg/m³ at Izania free troposphere site using manual filter pack method (Prestbo and Bloom). Is method biased?
- **DISCOVERY: 2000** - Using automated Hg speciation method, Landis and many others* started reporting high GOM in the free troposphere and Swartzendruber et al. (2006) published the first peer-reviewed article.
*Lyman, Jaffe, Obrist, Sheu, Feng, Slemr....

Select Hg Speciation Discoveries with strong scientific coherence


- High GOM and PBM observations where reactive halogen chemistry is favorable and no wet-deposition
 - Polar Regions
 - Dead Sea
 - Free Troposphere
 - Marine Boundary Layer
- Elevated PBM/GOM from Biomass fires
- Confirmation of speciated mercury emissions from point sources
 - Coal Burning, Chlor-Alkali Plants & Waste Incinerators

Two questions for the automated air mercury speciation method

- Scientists are asking:
- Exactly what is being measured?
- How accurate are the GOM and PBM measurements?

QA Challenge Example: GOM Manifold Comparison of 3 Tekran Systems

(See Olson et al., ICMGP-2013)

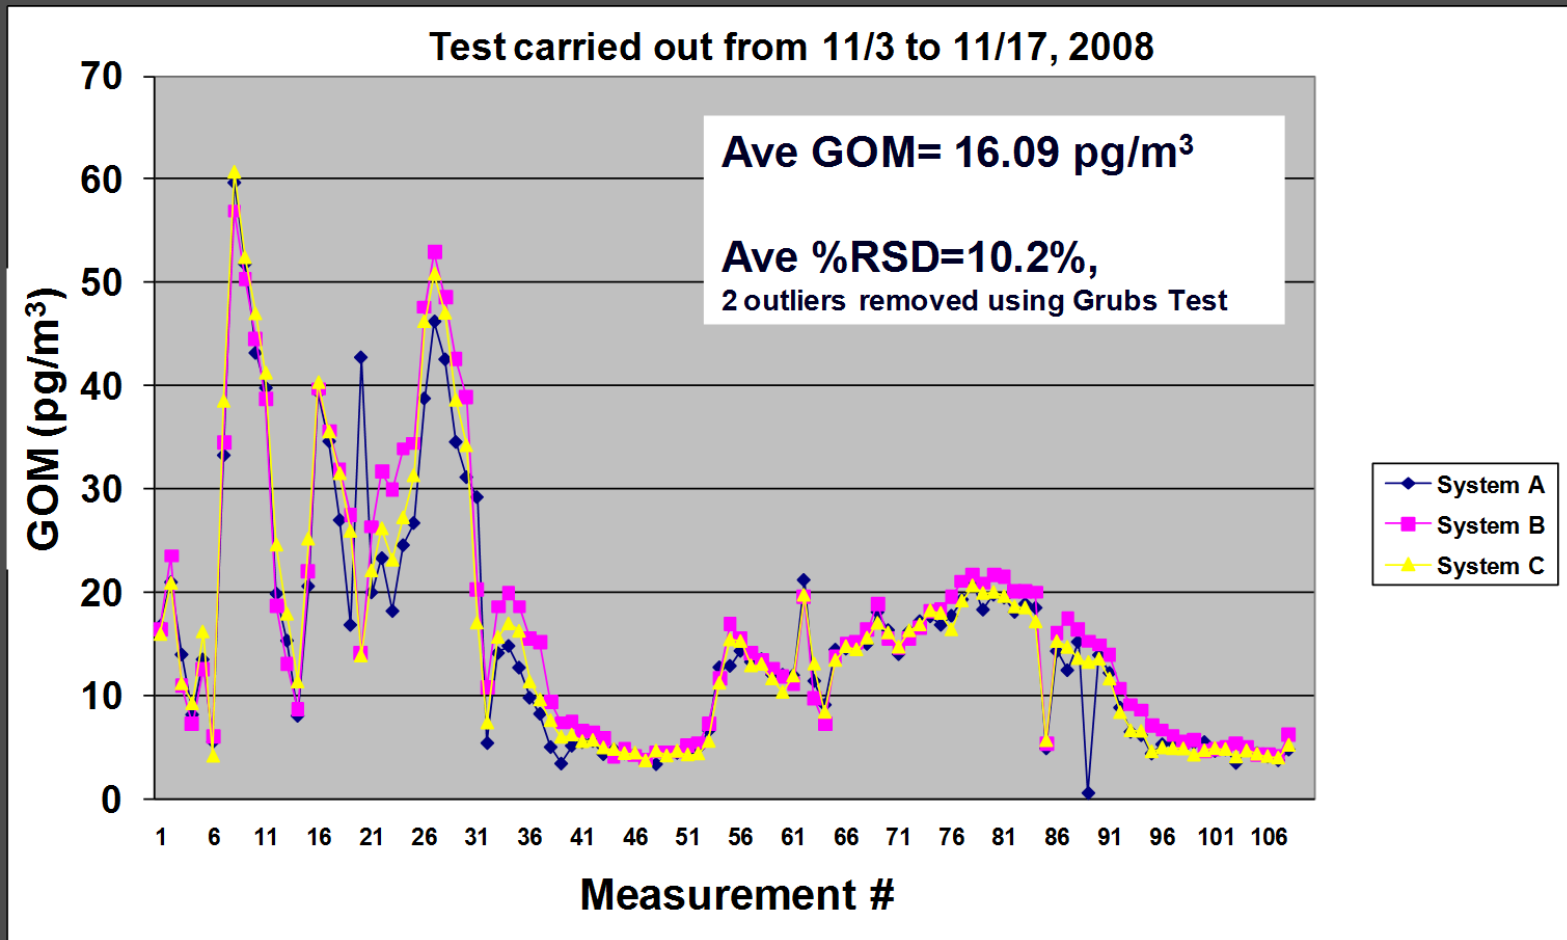


Side-Bar: Accuracy dependent on siting, operation, maintenance and QA

- 2007 Survey Says – experts rarely do external calibration and no audit of the sample volume measurement
- Inlet must be in free air with unobstructed large fetch
- Current and developing networks are improving the accuracy of Hg speciation measurements
 - CAMNet/CAPMoN, UBA-Germany, AMNet, GMOS, EMEP, AMAP, S. Korea, etc.


Traceable Hg⁰ calibration and performance check options

- Automated calibration with permeation source
- Validation of permeation source at injection port
- Manual standard additions at injection port
- Automated perm source std. additions with 1120

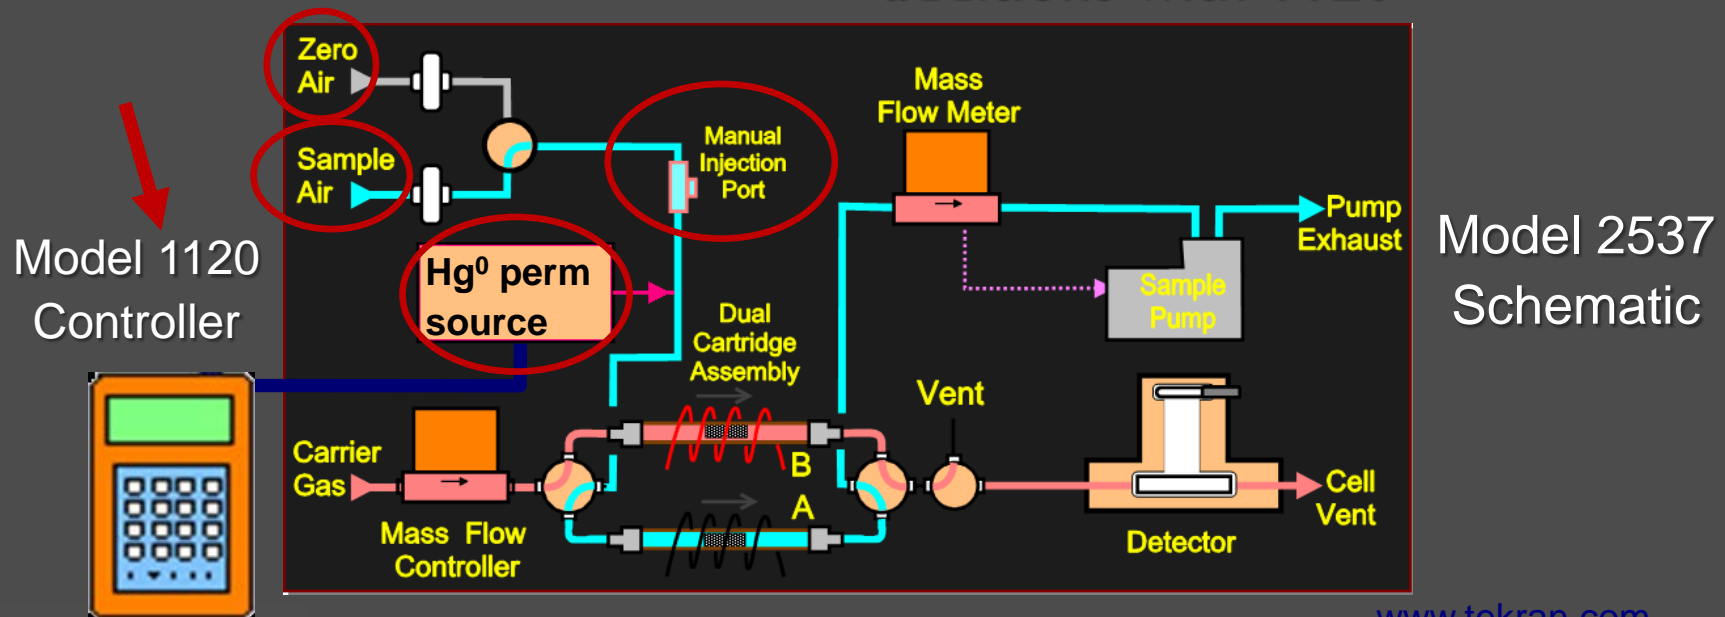

Traceable Hg^0 fictive-loss test options during ambient air sampling

1. Simple – manual Hg^0 injection upstream of the soda lime
2. Difficult – manual Hg^0 injection at 1130 inlet
3. Automated – proposed permeation source Hg injection at 1130 inlet

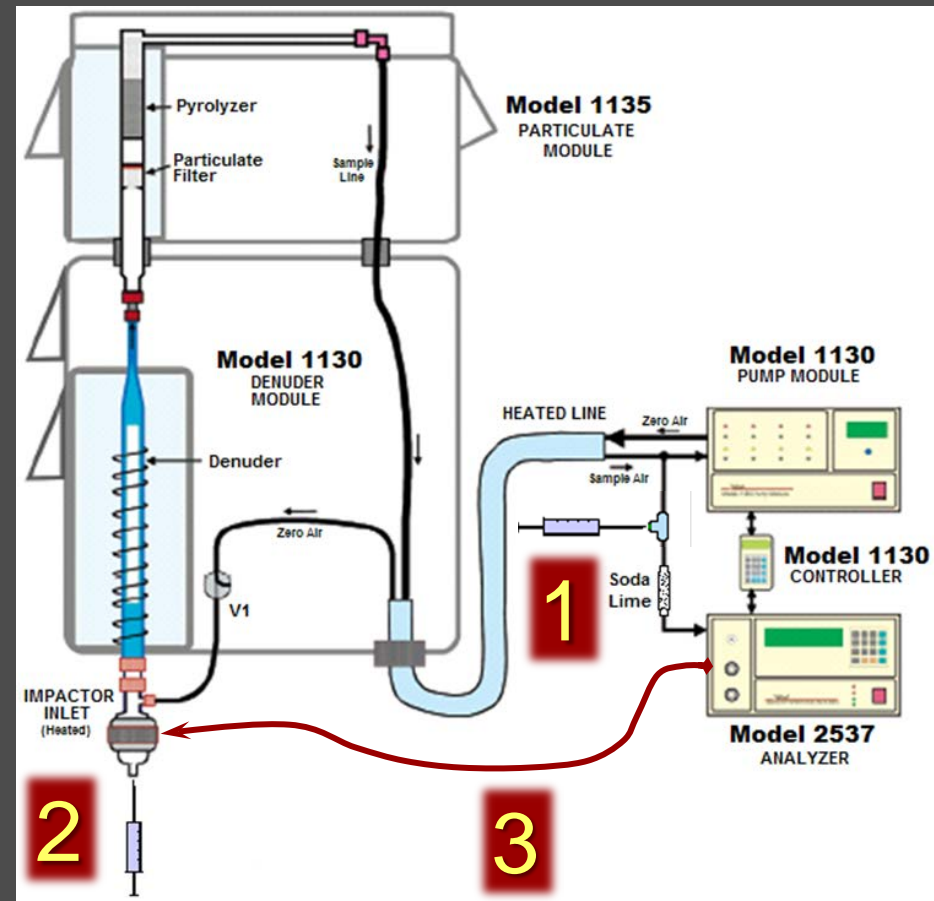

GOM Calibration Challenges

- HgCl_2 and HgBr_2 are solids at room temperature, so will adsorb to reactive and/or unheated surfaces
- Thus, quantitative transport requires optimization for laminar flow and short residence time (Tekran 1130 inlet and denuder) and/or brute force of high temperature through entire, non-reactive flow path (150-180° C)

GOM Calibration Challenges


- HgCl_2 adsorbed to surfaces will convert to Hg^0 , especially at high temperature or even changing air chemistry
- *parts per quadrillion* (10 to 500 picogram/ m^3) concentrations required for calibration
- Source must be stable, reproducible, robust and can be turned on & off

Traceable Calibration of GOM Measurements

- Available Methods

1. **Reaction** of traceable $\text{Hg}^0 + 2 \text{Cl} > \text{HgCl}_2(\text{g})$
(catalyzed by reactive metal surface) Not 100% efficient
2. **Gas permeation** of *pure* solid HgBr_2 to HgBr_2 gas (sublimation)
3. **Nebulization** of NIST traceable standard $[\text{HgCl}_4]^{2-}$ solution
4. **Manifold Spiking Research** – Ideally use independent NIST traceable GOM Source


The Trouble with Permeation for GOM Calibration

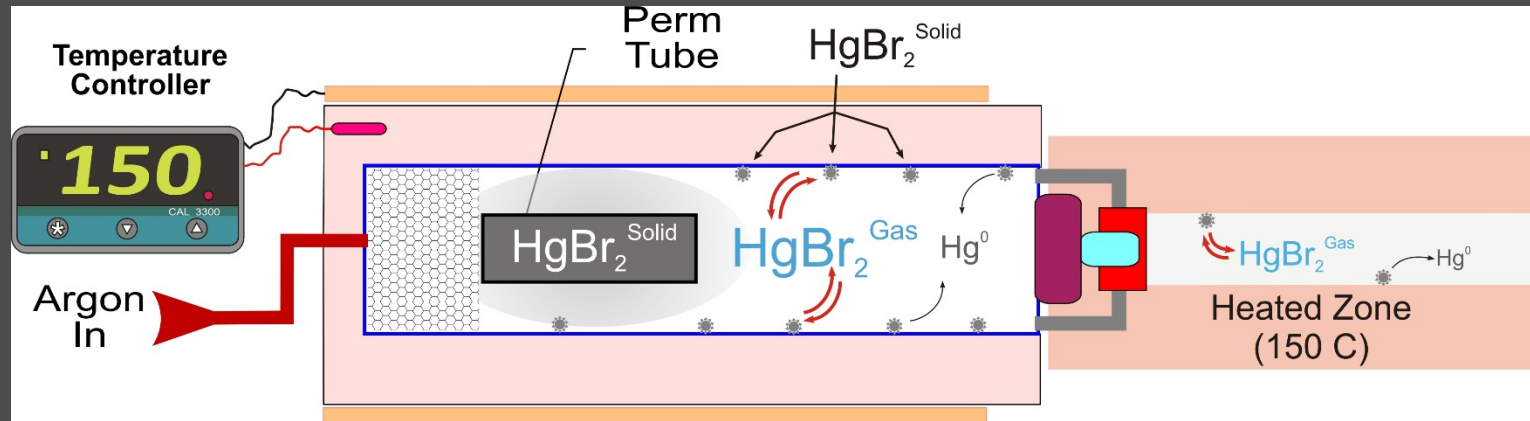

- **ADSORPTION:** Loss to surfaces in perm chamber or transport tubing (when off, cold spots) means device emission rate is a function of permeation and wall emissions.
- **STABILITY:** Wall losses in chamber or transport tubing, means that it can take weeks to stabilize or worse, the rate changes between uses
- **TEMPERATURE:** small changes in chamber or transport line temperature and/or humidity can cause big side-effects
- **CONVERSION:** HgBr_2 and HgCl_2 will convert to Hg^0 on surfaces

Nebulizing Liquid Hg Standard

Tekran Model 3315

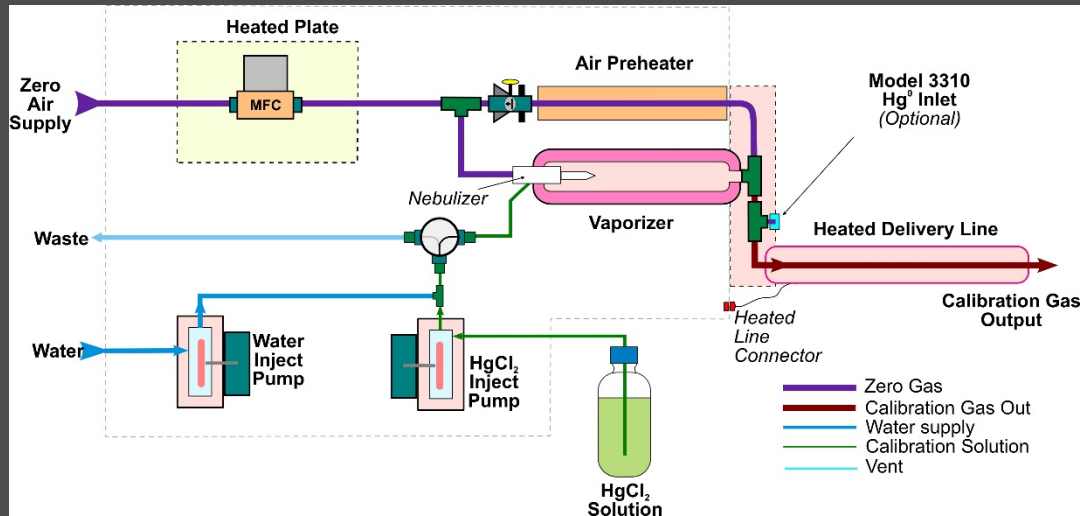


- Proven, traceable GOM source for HgCEM equipment QA
- Designed for 30 lpm and 1-40 $\mu\text{g}/\text{m}^3$

- Challenge is to modify device for delivery of GOM to the Tekran Model 1130 inlet at 1-15 lpm and 20 - 1000 $\mu\text{g}/\text{m}^3$.

Manifold Studies – RAMIX Comments

Gustin et al., doi:10.1021/es3039104

- Manifold studies to assess GOM and PBM accuracy are challenging and have a high degree of risk.

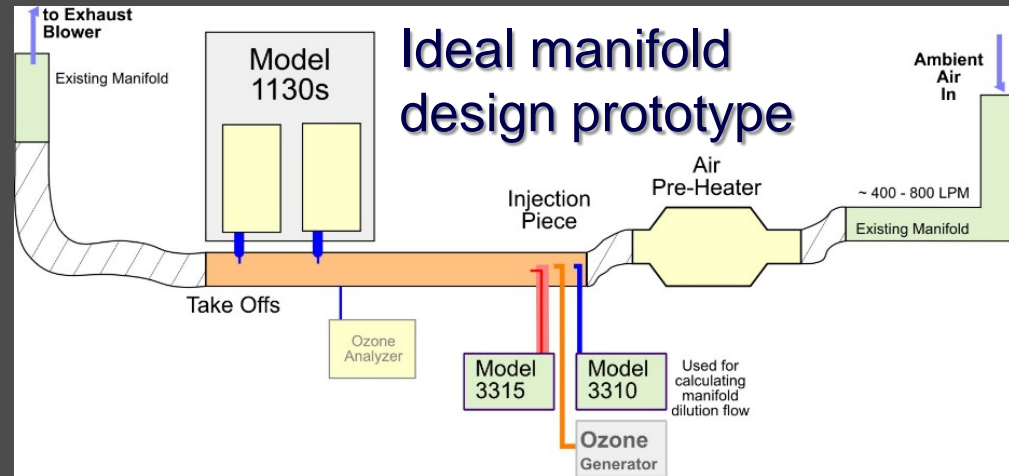

- The ideal manifold study would use GOM and GEM generators that are NIST traceable and independent of the measuring equipment being evaluated. RAMIX used a GOM permeation source, calibrated by the same equipment being evaluated.

Manifold Studies – RAMIX Comments

Gustin et al., doi:10.1021/es3039104

- GEM measurements did not agree using 2 highly QA'd identical Hg speciation instruments (Tekran) connected to the RAMIX manifold. A 30% fudge factor was applied to correct this experimental bias.
- GEM comparisons with two fully QA'd Hg speciation instruments are nominally better than 5%. GOM is nominally 10%.

Manifold Studies – RAMIX Comments

Gustin et al., doi:10.1021/es3039104

- Non-standard setup. 1.5 meters of inlet line & 4 lpm flow rate for the Tekran Hg speciation equipment. Transport losses and species conversion likely, but not tested.
- Lab manifold tests were done on a 1/4 length of the field manifold. Lab tests showed uncertainty and less than 100% transmission efficiency for GEM & GOM. Flow uncertainty was +/- 15%
- Unusual results were explained by hypothesizing that GOM was generated in the manifold.

Conclusions

- Determination of accuracy for GOM and PBM at the parts per quadrillion level are difficult, but badly needed
- The Tekran 3315 modified for ambient levels may be the best option for field-based GOM accuracy determination. Tekran needs willing partners and funding to implement.
- Manifold studies for accuracy are difficult to do and prone to have their own artifacts